



ISO 9001 Certified

Phone: (651) 451-6666

1-800-456-7777

Fax: (651) 451-5929

## Hot Rolled Steel Products

### Contents

<b>Angles</b>	<b>2</b>
<b>Bar Grating</b>	<b>3</b>
<b>Beams &amp; Tees</b>	<b>4</b>
<b>Cap Rail</b>	<b>6</b>
<b>Channels</b>	<b>6</b>
<b>Expanded Metal</b>	<b>8</b>
<b>Flats &amp; Strip</b>	<b>9</b>
<b>Floor Plate</b>	<b>12</b>
<b>Grip Step</b>	<b>13</b>
<b>Ladder Rung</b>	<b>13</b>
<b>Pipe</b>	<b>13</b>
<b>Plate</b>	<b>14</b>
<b>Rebar</b>	<b>14</b>
<b>Rounds</b>	<b>14</b>
<b>Sheets</b>	<b>15</b>
<b>Squares</b>	<b>17</b>
<b>Threaded Rods</b>	<b>17</b>
<b>X-Grate</b>	<b>17</b>

 Email us at: [sales@sspss.com](mailto:sales@sspss.com)




ISO 9001 Certified

Phone: (651) 451-6666

1-800-456-7777

Fax: (651) 451-5929

**Hot Rolled Angles**



Hot dip galvanized also available.

Stock lengths: 20 and 40 feet

Leg (A)	Leg (B)	Thickness (C)	Lbs/Ft	Lbs/20 Ft
1/2	1/2	1/8	.380	7.600
5/8	5/8	1/8	.480	9.600
3/4	3/4	1/8	.590	11.800
7/8	7/8	1/8	.700	14.000
1	5/8	1/8	.640	12.800
1	3/4	1/8	.700	14.000
1	1	1/8	.800	16.000
1	1	3/16	1.160	23.200
1	1	1/4	1.490	29.800
1-1/8	1-1/8	1/8	.900	18.000
1-1/4	1-1/4	1/8	1.010	20.200
1-1/4	1-1/4	3/16	1.480	29.600
1-1/4	1-1/4	1/4	1.920	38.400
1-3/8	7/8	1/8	.900	18.000
1-3/8	7/8	3/16	1.320	26.400
1-1/2	1-1/4	3/16	1.640	32.800
1-1/2	1-1/2	1/8	1.230	24.600
1-1/2	1-1/2	3/16	1.800	36.000
1-1/2	1-1/2	1/4	2.340	46.800
1-1/2	1-1/2	3/8	3.350	67.000
1-3/4	1-1/4	1/8	1.230	24.600
1-3/4	1-1/4	3/16	1.800	36.000
1-3/4	1-1/4	1/4	2.340	46.800
1-3/4	1-3/4	1/8	1.440	28.800
1-3/4	1-3/4	3/16	2.120	42.400
1-3/4	1-3/4	1/4	2.770	55.400
2	1-1/4	3/16	1.960	39.200
2	1-1/4	1/4	2.550	51.000
2	1-1/2	1/8	1.440	28.800
2	1-1/2	3/16	2.120	42.400
2	1-1/2	1/4	2.770	55.400
2	2	1/8	1.650	33.000
2	2	3/16	2.440	48.800
2	2	1/4	3.190	63.800
2	2	5/16	3.920	78.400
2	2	3/8	4.700	94.000
2-1/2	1-1/2	3/16	2.440	48.800
2-1/2	1-1/2	1/4	3.190	63.800
2-1/2	1-1/2	5/16	3.920	78.400
2-1/2	2	3/16	2.750	55.000
2-1/2	2	1/4	3.620	72.400
2-1/2	2	5/16	4.500	90.000
2-1/2	2	3/8	5.300	106.000
2-1/2	2-1/2	3/16	3.070	64.400
2-1/2	2-1/2	1/4	4.100	82.000

Continued →

Leg (A)	Leg (B)	Thickness (C)	Lbs/Ft	Lbs/20 Ft
2-1/2	2-1/2	5/16	5.000	100.000
2-1/2	2-1/2	3/8	5.900	118.000
2-1/2	2-1/2	1/2	7.700	154.000
3	2	3/16	3.070	61.400
3	2	1/4	4.100	82.000
3	2	5/16	5.000	100.000
3	2	3/8	5.900	118.000
3	2	1/2	7.700	154.000
3	2-1/2	3/16	3.350	67.000
3	2-1/2	1/4	4.500	90.000
3	2-1/2	5/16	5.600	112.000
3	2-1/2	3/8	6.600	132.000
3	2-1/2	1/2	8.500	170.000
3	3	3/16	3.710	74.200
3	3	1/4	4.900	98.000
3	3	5/16	6.100	122.000
3	3	3/8	7.200	144.000
3	3	1/2	9.400	188.000
3-1/2	2-1/2	1/4	4.900	98.000
3-1/2	2-1/2	5/16	6.100	122.000
3-1/2	2-1/2	3/8	7.200	144.000
3-1/2	2-1/2	1/2	9.400	188.000
3-1/2	3	1/4	5.400	108.000
3-1/2	3	5/16	6.600	132.000
3-1/2	3	3/8	7.900	158.000
3-1/2	3	1/2	10.200	204.000
3-1/2	3-1/2	1/4	5.800	116.000
3-1/2	3-1/2	5/16	7.200	144.000
3-1/2	3-1/2	3/8	8.500	170.000
3-1/2	3-1/2	1/2	11.100	222.000
4	3	1/4	5.800	116.000
4	3	5/16	7.200	144.000
4	3	3/8	8.500	170.000
4	3	1/2	11.100	222.000
4	3-1/2	1/4	6.200	124.000
4	3-1/2	5/16	7.700	154.000
4	3-1/2	3/8	9.100	182.000
4	3-1/2	1/2	11.900	238.000
4	4	1/4	6.600	132.000
4	4	5/16	8.200	164.000
4	4	3/8	9.800	196.000
4	4	1/2	12.800	256.000
4	4	5/8	15.700	314.000
4	4	3/4	18.500	370.000

Continued on next page →



Need help with that hard to find item?  
Call us this is our specialty!




ISO 9001 Certified

Phone: (651) 451-6666

1-800-456-7777

Fax: (651) 451-5929

**Hot Rolled Angles**




Hot dip galvanized also available.

Stock lengths: 20 and 40 feet

Leg (A)	Leg (B)	Thickness (C)	Lbs/Ft	Lbs/20 Ft
5	3	1/4	6.600	132.000
5	3	5/16	8.200	164.000
5	3	3/8	9.800	196.000
5	3	1/2	12.800	256.000
5	3-1/2	1/4	7.000	140.000
5	3-1/2	5/16	8.700	174.000
5	3-1/2	3/8	10.400	208.000
5	3-1/2	1/2	13.600	272.000
5	3-1/2	3/4	19.800	396.000
5	5	5/16	10.300	206.000
5	5	3/8	12.300	246.000
5	5	1/2	16.200	324.000
5	5	5/8	20.000	400.000
5	5	3/4	23.600	472.000
6	3-1/2	1/4	7.900	158.000
6	3-1/2	5/16	9.800	196.000
6	3-1/2	3/8	11.700	234.000
6	3-1/2	1/2	15.300	306.000
6	4	5/16	10.300	206.000
6	4	3/8	12.300	246.000
6	4	1/2	16.200	324.000
6	4	5/8	20.000	400.000
6	4	3/4	23.600	472.000
6	6	5/16	12.500	250.000
6	6	3/8	14.900	298.000
6	6	1/2	19.600	392.000
6	6	5/8	24.200	484.000
6	6	3/4	28.700	574.000
6	6	1	37.400	748.000
7	4	3/8	13.600	272.000
7	4	1/2	17.900	358.000
7	4	3/4	26.200	524.000
8	4	1/2	19.600	392.000
8	4	3/4	28.700	574.000
8	6	1/2	23.000	460.000
8	6	3/4	33.800	676.000
8	6	1	44.200	884.000
8	8	1/2	26.400	528.000
8	8	5/8	32.700	654.000
8	8	3/4	38.900	778.000
8	8	1	51.000	1020.000
9	4	1/2	21.300	426.000

Pieces can be cut to size to meet your requirements.

**Bar Grating**

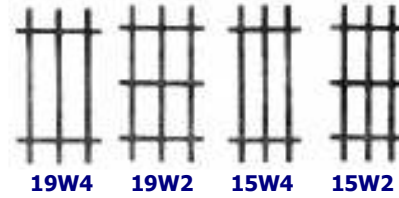

**Bearing bars C to C**

1-3/16" 1-3/16" 15/16" 15/16"

**Cross bars C to C**

4" 2" 4" 2"

Available bare, painted black, or galvanized with serrated or non-serrated edges.  
Stock widths: 24" and 36" - Stock lengths: 20' and 24'

Weight in Lbs/Ft

Bearing bars	Cross bars	Type 19W4	Type 19W2	Type 15W4	Type 15W2
1/8 x 3/4	1/4	3.990	4.630	4.950	5.590
3/16 x 3/4	1/4	5.670	6.310	7.110	7.750
1/8 x 1	1/4	5.150	5.790	6.440	7.080
3/16 x 1	1/4	7.350	7.990	9.270	9.910
1/8 x 1-1/4	1/4	6.200	6.840	7.790	8.430
3/16 x 1-1/4	1/4	9.030	9.670	11.430	12.070
1/8 x 1-1/2	1/4	7.350	7.990	9.270	9.910
3/16 x 1-1/2	5/16	10.940	11.200	13.820	14.680
3/16 x 1-3/4	5/16	12.620	13.480	15.980	16.840
3/16 x 2	5/16	14.300	15.160	18.140	19.000



South St. Paul Steel has its own fleet of trucks so we deliver when you need it!





ISO 9001 Certified


Phone: (651) 451-6666

1-800-456-7777

Fax: (651) 451-5929

**Hot Rolled Beams & Tees**

**W-Beams (Wide Flange)**



Hot dip galvanized also available.

Stock lengths: 20 and 40 feet

Depth x Lbs/Ft	Depth in inches (A)	Web Thickness (B)	Flange width (C)	Flange thickness (D)
4 x 13	4.160	.280	4.060	.345
5 x 16	5.010	.240	5.000	.360
5 x 19	5.150	.270	5.030	.430
6 x 9	5.900	.170	3.940	.215
6 x 12	6.030	.230	4.000	.280
6 x 15	5.990	.230	5.990	.260
6 x 16	6.280	.260	4.030	.405
6 x 20	6.200	.260	6.020	.365
6 x 25	6.380	.320	6.080	.455
8 x 10	7.890	.170	3.940	.205
8 x 13	7.990	.230	4.000	.255
8 x 15	8.110	.245	4.015	.315
8 x 18	8.140	.230	5.250	.330
8 x 21	8.280	.250	5.270	.400
8 x 24	7.930	.245	6.495	.400
8 x 28	8.060	.285	6.535	.465
8 x 31	8.000	.285	7.995	.435
8 x 35	8.120	.310	8.020	.495
8 x 40	8.250	.360	8.070	.560
8 x 58	8.750	.510	8.220	.810
8 x 67	9.000	.570	8.280	.935
10 x 12	9.870	.190	3.960	.210
10 x 15	9.990	.230	4.000	.270
10 x 17	10.110	.240	4.010	.330
10 x 19	10.240	.250	4.020	.395
10 x 22	10.170	.240	5.750	.360
10 x 26	10.330	.260	5.770	.440
10 x 30	10.470	.300	5.810	.510
10 x 33	9.730	.290	7.960	.435
10 x 39	9.920	.315	7.985	.530
10 x 45	10.100	.350	8.020	.620
10 x 49	9.980	.340	10.000	.560
10 x 54	10.090	.370	10.030	.615
10 x 60	10.220	.420	10.080	.680
10 x 68	10.400	.470	10.130	.770
10 x 77	10.600	.530	10.190	.870
10 x 88	10.840	.605	10.265	.990
10 x 100	11.100	.680	10.340	1.120
10 x 112	11.360	.755	10.415	1.250

Continued →

Depth x Lbs/Ft	Depth in inches (A)	Web Thickness (B)	Flange width (C)	Flange thickness (D)
12 x 14	11.910	.200	3.970	.225
12 x 16	11.990	.220	3.990	.265
12 x 19	12.160	.235	4.005	.350
12 x 22	12.310	.260	4.030	.425
12 x 26	12.220	.230	6.490	.380
12 x 30	12.340	.260	6.520	.440
12 x 35	12.500	.300	6.560	.520
12 x 40	11.940	.295	8.005	.515
12 x 45	12.060	.335	8.045	.575
12 x 50	12.190	.370	8.080	.640
12 x 53	12.060	.345	9.995	.575
12 x 58	12.190	.360	10.010	.640
12 x 65	12.120	.390	12.000	.605
12 x 72	12.250	.430	12.040	.670
12 x 79	12.380	.470	12.080	.735
12 x 87	12.530	.515	12.125	.810
12 x 96	12.710	.550	12.160	.900
12 x 106	12.890	.610	12.220	.990
14 x 22	13.740	.230	5.000	.335
14 x 26	13.910	.255	5.025	.420
14 x 30	13.840	.270	6.730	.385
14 x 34	13.980	.285	6.745	.455
14 x 38	14.100	.310	6.770	.515
14 x 43	13.660	.305	7.995	.530
14 x 48	13.790	.340	8.030	.595
14 x 53	13.920	.370	8.060	.660
14 x 61	13.890	.375	9.995	.645
14 x 74	14.170	.450	10.070	.785
14 x 82	14.310	.510	10.130	.855
14 x 90	14.020	.440	14.520	.710
14 x 99	14.160	.485	14.565	.780
14 x 109	14.320	.525	14.605	.860
16 x 26	15.690	.250	5.500	.345
16 x 31	15.880	.275	5.525	.440
16 x 36	15.860	.295	6.985	.430
16 x 40	16.010	.305	6.995	.505
16 x 45	16.130	.345	7.035	.565
16 x 50	16.260	.380	7.070	.630
16 x 57	16.430	.430	7.120	.715
16 x 67	16.330	.395	10.235	.665
16 x 77	16.520	.455	10.295	.760
16 x 89	16.750	.525	10.365	.875
16 x 100	16.970	.585	10.425	.985

Continued on next page →



ISO 9001 Certified

Committed to meeting our customers' requirements when and where they need it.



ISO 9001 Certified


Phone: (651) 451-6666

1-800-456-7777

Fax: (651) 451-5929

**Hot Rolled Beams & Tees**

**W-Beams (Wide Flange)**



Hot dip galvanized also available.


Stock lengths: 20 and 40 feet

Depth x Lbs/Ft	Depth in inches (A)	Web Thickness (B)	Flange width (C)	Flange thickness (D)
18 x 35	17.700	.300	6.000	.425
18 x 40	17.900	.315	6.015	.525
18 x 46	18.060	.360	6.060	.605
18 x 50	17.990	.355	7.495	.570
18 x 55	18.110	.390	7.530	.630
18 x 60	18.240	.415	7.555	.695
18 x 65	18.350	.450	7.590	.750
18 x 71	18.470	.495	7.635	.810
18 x 86	18.390	.480	11.090	.770
18 x 97	18.590	.535	11.145	.870
18 x 106	18.730	.590	11.200	.940
18 x 119	18.970	.655	11.265	1.060
21 x 44	20.660	.350	6.500	.450
21 x 50	20.830	.380	6.530	.535
21 x 57	21.060	.405	6.555	.650
21 x 62	20.990	.400	8.240	.615
21 x 68	21.130	.430	8.270	.685
21 x 73	21.240	.455	8.295	.740
21 x 111	21.510	.550	12.340	.875
24 x 55	23.570	.395	7.005	.505
24 x 62	23.740	.430	7.040	.590
24 x 68	23.730	.415	8.965	.585
24 x 76	23.920	.440	8.990	.680
24 x 84	24.100	.470	9.020	.770
24 x 94	24.310	.515	9.0650	.875
24 x 104	24.060	.500	12.750	.750
27 x 94	26.920	.490	9.990	.745
30 x 99	29.650	.520	10.450	.670

Credit cards accepted:



**S-Beams (Standard)**




Hot dip galvanized also available.

Stock lengths: 20 and 40 feet

Depth in inches (A)	Lbs/Ft	Web thickness (B)	Flange width (C)	Flange thickness (D)
3	5.7	.170	2.330	.260
3	7.5	.349	2.509	.260
4	7.7	.193	2.663	.293
4	9.5	.326	2.796	.293
5	10	.214	3.004	.326
5	14.75	.494	3.284	.326
6	12.5	.232	3.332	.359
6	17.25	.465	3.565	.359
7	15.3	.252	3.662	.392
7	20	.450	3.860	.392
8	18.4	.271	4.001	.425
8	23	.441	4.171	.425
10	25.4	.311	4.661	.491
10	35	.594	4.994	.491
12	31.8	.350	5.000	.544
12	35	.428	5.078	.544
12	40.8	.472	5.252	.659
12	50	.687	5.477	.659
15	42.9	.411	5.501	.622
15	50	.687	5.640	.659
18	54.7	.461	6.001	.691
18	70	.711	6.251	.691
20	66	.505	5.640	.795
20	86	.660	7.060	.920
24	80	.500	7.000	.870
24	100	.745	7.245	.870
24	106	.620	7.870	1.090

**M-Beams (Jr., H or Light Beams)**



Depth in inches (A)	Lbs/Ft	Web thickness (B)	Flange width (C)	Flange thickness (D)
5	18.9	.316	5.003	.416
6	4.4	.114	1.844	.171
8	6.5	.135	2.281	.189
10	9	.157	2.690	.206
12	11.8	.177	3.065	.225




ISO 9001 Certified

Phone: (651) 451-6666

1-800-456-7777

Fax: (651) 451-5929

**Tees (Bar Size) \***



Hot dip galvanized also available.

Stock length: 20 feet

Flange in inches (A)	Stem (B)	Stem thickness (C)	Lbs/Ft
1-1/2	1-1/2	3/16	1.900
1-1/2	1-1/2	1/4	2.430
1-3/4	1-3/4	3/16	2.160
2	2	1/4	3.620
2-1/2	2-1/2	1/4	4.600

\* Any size beam can be split to make two Tee sections.

**Cap Rail**

Type	Lbs/Ft	Lbs/20 Ft
1606L	1.270	25.400
1621L	1.250	25.000

**Hot Rolled Channels**



**Channels (Bar Size)**

Hot dip galvanized also available.

Stock length: 20 feet

Depth in inches (A)	Web thickness (B)	Flange width (C)	Lbs/Ft
3/4	1/8	3/8	.560
1	1/8	3/8	.680
1	1/8	1/2	.840
1-1/8	3/16	9/16	1.160
1-1/4	1/8	1/2	1.010
1-1/2	1/8	1/2	1.120
1-1/2	3/16	9/16	1.440
1-1/2	1/8	3/4	1.170
2	1/8	1/2	1.430
2	3/16	9/16	1.860
2	1/4	5/8	2.280
2	1/8	1	1.590
2	3/16	1	2.320
2-1/2	3/16	5/8	2.270

**C-Channels (Standard)**



Hot dip galvanized also available.

Stock lengths: 20 and 40 feet

Depth in inches (A)	Lbs/Ft	Web thickness (B)	Flange width (C)
3	4.1	.170	1.410
3	5	.258	1.498
3	6	.356	1.596
4	5.4	.184	1.584
4	6.25	.247	1.647
4	7.25	.321	1.721
5	6.7	.190	1.750
5	9	.325	1.885
6	8.2	.200	1.920
6	10.5	.314	2.034
6	13	.437	2.157
7	9.8	.210	2.090
7	12.25	.314	2.194
7	14.75	.419	2.299
8	11.5	.220	2.260
9	13.4	.233	2.433
9	15	.285	2.485
9	20	.448	2.648
10	15.3	.240	2.600
10	20	.379	2.739
10	25	.526	2.886
10	30	.673	3.033
12	20.7	.282	2.942
12	25	.387	3.047
12	30	.510	3.170
15	33.9	.400	3.400
15	40	.520	3.520
15	50	.716	3.716



Same day will call and next day delivery available on any item in stock!




ISO 9001 Certified

Phone: (651) 451-6666

1-800-456-7777

Fax: (651) 451-5929

**MC-Channels (Ship and Car)**




Hot dip galvanized also available.

Stock lengths: 20 and 40 feet

Depth in inches (A)	Lbs/Ft	Web thickness (B)	Flange width (C)
3	7.1	.312	1.938
4	13.8	.500	2.500
6	12	.310	2.497
6	15.1	.316	2.941
6	15.3	.340	3.500
6	16.3	.375	3.000
6	18	.379	3.504
7	19.1	.352	3.452
7	22.7	.503	3.603
8	18.7	.353	2.978
8	20	.400	3.025
8	21.4	.375	3.450
8	22.8	.427	3.502
9	23.9	.400	3.450
9	25.4	.450	3.500
10	22	.312	3.315
10	25	.380	3.405
10	28.5	.425	3.950
10	33.6	.575	4.100
10	41.1	.796	4.321
12	31	.370	3.670
12	35	.467	3.767
12	40	.590	3.890
12	45	.712	4.012
12	50	.835	4.135
13	31.8	.375	4.000
13	50	.787	4.412
18	42.7	.450	3.950
18	45.8	.500	4.000
18	51.9	.600	4.100
18	58	.700	4.200

**MC-Channels (Jr. Channels)**



Hot dip galvanized also available.

Stock lengths: 20 and 40 feet

Depth in inches (A)	Lbs/Ft	Web thickness (B)	Flange width (C)
8	8.5	.180	1.875
10	6.5	.152	1.127
10	8.4	.170	1.500
12	10.6	.190	1.500



South St. Paul Steel offers a variety of value added processing services including:

- Bending
- Certified Welding
- Cold Coat Galvanizing
- Drilling
- Finish Coating
- Flame Cutting
- Forming
- Painting
- Punching
- Sand Blasting
- Saw Cutting
- Shearing
- Shop Priming
- Shot Blasting
- Threading



ISO 9001 Certified



ISO 9001 Certified

Phone: (651) 451-6666

1-800-456-7777

Fax: (651) 451-5929

**Expanded Metal**

**Standard Expanded Metal**



Style designation	Width in inches	Length in inches	Lbs/Sq Ft	Approx. size of opening in inches
1/4 x 20GA	48	96	.860	11/64 x 23/32
1/4 x 18GA	48	96	1.140	11/64 x 23/32
1/2 x 20GA	48	96	.430	7/16 x 15/16
1/2 x 18GA	48, 60, 72	96, 120, 144	.700	7/16 x 15/16
1/2 x 16GA	48, 60, 72	96, 120, 144	.860	3/8 x 15/16
1/2 x 13GA	48, 60, 72	96, 120, 144	1.470	5/16 x 15/16
3/4 x 16GA	48, 60, 72	96, 120, 144	.540	13/16 x 1-3/4
3/4 x 13GA	48, 60, 72	96, 120, 144	.800	3/4 x 1-11/16
3/4 x 9GA	48, 60, 72	96, 120, 144	1.800	11/16 x 1-9/16
1 x 16GA	48	96, 120, 144	.440	15/16 x 2-1/16
1-1/2 x 16GA	48	96, 120, 144	.400	1-1/4 x 2-5/8
1-1/2 x 13GA	48, 60, 72	96, 120, 144	.600	1-13/16 x 2-1/2
1-1/2 x 10GA	48, 60, 72	96, 120, 144	.790	1-13/16 x 2-1/2
1-1/2 x 9GA	48, 60, 72	96, 120, 144	1.200	1-1/8 x 2-3/8
1-1/2 x 6GA	48, 60, 72	96, 120, 144	2.500	1-7/64 x 2-15/16
2 x 9GA	48	96	.900	1-9/16 x 3-3/8

**Flattened Expanded Metal**



Style designation	Width in inches	Length in inches	Lbs/Sq Ft	Approx. size of opening in inches
1/4 x #20	48	96	.830	3/32 x 11/16
1/4 x #18	48	96	1.110	3/32 x 11/16
1/2 x #20	48, 72	96, 120, 144	.400	9/32 x 1
1/2 x #18	48, 72	96, 120, 144	.660	9/32 x 1
1/2 x #16	48, 60, 72	96, 120, 144	.820	1/4 x 1
1/2 x #13	48, 60, 72	96, 120, 144	1.400	1/4 x 1
3/4 x #16	48, 60, 72	96, 120, 144	.510	3/4 x 1-3/4
3/4 x #14	48, 60, 72	96, 120	.630	11/16 x 1-13/16
3/4 x #13	48, 60, 72	96, 120, 144	.750	11/16 x 1-25/32
3/4 x #9	48, 60, 72	96, 120, 144	1.710	9/16 x 1-11/16
1 x #16	48, 60	96	.410	13/16 x 2-1/4
1-1/2 x #16	48, 60	96	.380	1-1/16 x 2-3/4
1-1/2 x #14	48, 60, 72	96	.460	1-1/16 x 2-3/4
1-1/2 x #13	48, 60, 72	96	.570	1-1/16 x 2-3/4
1-1/2 x #9	48, 60, 72	96, 120, 144	1.140	1 x 2-9/16

**Sheets of special size can be furnished to meet your requirements.**



ISO 9001 Certified





ISO 9001 Certified

Phone: (651) 451-6666

1-800-456-7777

Fax: (651) 451-5929

**Hot Rolled Flats and Strip**

**Hot Rolled Strip (Low Carbon)\***

**Hot dipped galvanized or pickled & oiled available.**

Stock length: 20 feet

Thickness	Width	Lbs/Ft
1/8	1/2	.213
1/8	5/8	.266
1/8	3/4	.319
1/8	7/8	.372
1/8	1	.425
1/8	1-1/8	.478
1/8	1-1/4	.531
1/8	1-3/8	.584
1/8	1-1/2	.638
1/8	1-3/4	.744
1/8	2	.850
1/8	2-1/4	.956
1/8	2-1/2	1.063
1/8	2-3/4	1.169
1/8	3	1.275
1/8	3-1/4	1.381
1/8	3-1/2	1.488
1/8	4	1.700
1/8	4-1/2	1.913
1/8	5	2.125
1/8	5-1/2	2.338
1/8	6	2.550
1/8	7	2.975
1/8	8	3.400
1/8	10	4.250
1/8	12	5.100
3/16	1/2	.319
3/16	5/8	.399
3/16	3/4	.479
3/16	7/8	.559
3/16	1	.638
3/16	1-1/8	.717
3/16	1-1/4	.797
3/16	1-3/8	.877
3/16	1-1/2	.956
3/16	1-3/4	1.116
3/16	2	1.276
3/16	2-1/4	1.434
3/16	2-1/2	1.594
3/16	2-3/4	1.753
3/16	3	1.913
3/16	3-1/4	2.072
3/16	3-1/2	2.231
3/16	4	2.550
3/16	4-1/2	2.869
3/16	5	3.188
3/16	5-1/2	3.506
3/16	6	3.825

Continued →

Thickness	Width	Lbs/Ft
3/16	7	4.463
3/16	8	5.100
3/16	9	5.738
3/16	10	6.375
3/16	11	7.013
3/16	12	7.650

\* The surface of low carbon hot rolled strip is normal mill oxide. Recommended for use in applications where surface is not critical.

**Hot Rolled Flats**

**Hot dipped galvanized or pickled & oiled available.**

Stock length: 20 feet

Thickness	Width	Lbs/Ft
1/4	1/2	.425
1/4	5/8	.531
1/4	3/4	.638
1/4	7/8	.744
1/4	1	.850
1/4	1-1/8	.956
1/4	1-1/4	1.063
1/4	1-3/8	1.169
1/4	1-1/2	1.275
1/4	1-5/8	1.381
1/4	1-3/4	1.488
1/4	2	1.700
1/4	2-1/4	1.913
1/4	2-1/2	2.125
1/4	2-3/4	2.338
1/4	3	2.550
1/4	3-1/4	2.763
1/4	3-1/2	2.975
1/4	3-3/4	3.188
1/4	4	3.400
1/4	4-1/4	3.613
1/4	4-1/2	3.825
1/4	5	4.250
1/4	5-1/2	4.675
1/4	6	5.100
1/4	7	5.950
1/4	7-1/2	6.375
1/4	8	6.800
1/4	9	7.650
1/4	10	8.500
1/4	11	9.350
1/4	12	10.200

Continued on next page →





ISO 9001 Certified

Phone: (651) 451-6666

1-800-456-7777

Fax: (651) 451-5929

**Hot Rolled Flats**

**Hot dipped galvanized or pickled & oiled available.**

Stock length: 20 feet

Thickness	Width	Lbs/Ft
5/16	3/4	.797
5/16	7/8	.930
5/16	1	1.063
5/16	1-1/8	1.195
5/16	1-1/4	1.328
5/16	1-3/8	1.461
5/16	1-1/2	1.594
5/16	1-3/4	1.859
5/16	2	2.125
5/16	2-1/4	2.391
5/16	2-1/2	2.656
5/16	2-3/4	2.922
5/16	3	3.188
5/16	3-1/4	3.453
5/16	3-1/2	3.719
5/16	4	4.250
5/16	4-1/2	4.781
5/16	5	5.313
5/16	5-1/2	5.844
5/16	6	6.375
5/16	7	7.438
5/16	8	8.500
3/8	1/2	.638
3/8	3/4	.956
3/8	7/8	1.116
3/8	1	1.275
3/8	1-1/8	1.434
3/8	1-1/4	1.594
3/8	1-3/8	1.753
3/8	1-1/2	1.913
3/8	1-5/8	2.072
3/8	1-3/4	2.231
3/8	2	2.550
3/8	2-1/4	2.869
3/8	2-1/2	3.188
3/8	2-3/4	3.506
3/8	3	3.825
3/8	3-1/4	4.144
3/8	3-1/2	4.463
3/8	3-5/8	4.622
3/8	4	5.100
3/8	4-1/2	5.738
3/8	5	6.375
3/8	5-1/2	7.013
3/8	6	7.650
3/8	6-1/2	8.288
3/8	7	8.925
3/8	8	10.200
3/8	9	11.480
3/8	10	12.750

Continued →

Thickness	Width	Lbs/Ft
3/8	11	14.030
3/8	12	15.300
7/16	1-1/4	1.859
7/16	1-1/2	2.231
7/16	2	2.975
7/16	2-1/2	3.719
7/16	3	4.463
7/16	5	7.438
1/2	5/8	1.059
1/2	3/4	1.275
1/2	1	1.700
1/2	1-1/8	1.913
1/2	1-1/4	2.125
1/2	1-3/8	2.338
1/2	1-1/2	2.550
1/2	1-5/8	2.763
1/2	1-3/4	2.975
1/2	2	3.400
1/2	2-1/4	3.825
1/2	2-1/2	4.122
1/2	2-3/4	4.675
1/2	3	5.100
1/2	3-1/4	5.525
1/2	3-1/2	5.950
1/2	3-3/4	6.375
1/2	4	6.800
1/2	4-1/2	7.650
1/2	5	8.500
1/2	5-1/2	9.350
1/2	6	10.200
1/2	7	11.900
1/2	7-1/4	12.330
1/2	8	13.600
1/2	8-1/2	14.450
1/2	9	15.300
1/2	9-1/2	16.150
1/2	10	17.000
1/2	11	18.700
1/2	12	20.400
5/8	3/4	1.594
5/8	1	2.125
5/8	1-1/4	2.656
5/8	1-3/8	2.922
5/8	1-1/2	3.188
5/8	1-3/4	3.719
5/8	2	4.250
5/8	2-1/4	4.781
5/8	2-1/2	5.313
5/8	2-3/4	5.844
5/8	3	6.375
5/8	3-1/4	6.906
5/8	3-1/2	7.438

Continued on next page →





ISO 9001 Certified

Phone: (651) 451-6666

1-800-456-7777

Fax: (651) 451-5929

**Hot Rolled Flats**

**Hot dipped galvanized or pickled & oiled available.**

Stock length: 20 feet

Thickness	Width	Lbs/Ft
5/8	4	8.500
5/8	4-1/2	9.563
5/8	5	10.630
5/8	5-1/2	11.690
5/8	6	12.750
5/8	7	14.880
5/8	8	17.000
5/8	9	19.130
5/8	10	21.250
5/8	12	25.500
3/4	1	2.550
3/4	1-1/8	2.869
3/4	1-1/4	3.188
3/4	1-1/2	3.825
3/4	1-5/8	4.144
3/4	1-3/4	4.463
3/4	1-7/8	4.781
3/4	2	5.100
3/4	2-1/4	5.738
3/4	2-1/2	6.375
3/4	2-3/4	7.013
3/4	3	7.650
3/4	3-1/4	8.288
3/4	3-1/2	8.925
3/4	4	10.200
3/4	4-1/2	11.480
3/4	5	12.750
3/4	5-1/2	14.030
3/4	6	15.300
3/4	7	17.850
3/4	8	20.400
3/4	9	22.950
3/4	10	25.500
3/4	12	30.600
7/8	1-1/4	3.719
7/8	1-1/2	4.463
7/8	1-3/4	5.206
7/8	2	5.950
7/8	2-1/4	6.694
7/8	2-1/2	7.438
7/8	2-3/4	8.181
7/8	3	8.925
7/8	3-1/2	10.410
7/8	4	11.900
7/8	4-1/2	13.390
7/8	5	14.880
7/8	5-1/2	16.360
7/8	6	17.850
7/8	7	20.830
7/8	8	23.800

Continued →

Thickness	Width	Lbs/Ft
1	1-1/4	4.250
1	1-1/2	5.100
1	1-3/4	5.950
1	2	6.800
1	2-1/4	7.650
1	2-1/2	8.500
1	2-3/4	9.350
1	3	10.200
1	3-1/4	11.050
1	3-1/2	11.900
1	4	13.600
1	4-1/2	15.300
1	5	17.000
1	5-1/2	18.700
1	6	20.400
1	7	23.800
1	8	27.200
1	9	30.600
1	10	34.000
1	12	40.800
1-1/8	2	7.650
1-1/8	2-1/2	9.563
1-1/8	3	11.480
1-1/8	4	15.300
1-1/8	5	19.130
1-1/8	6	22.950
1-1/8	8	30.600
1-1/4	1-1/2	6.375
1-1/4	1-3/4	7.440
1-1/4	2	8.500
1-1/4	2-1/4	9.560
1-1/4	2-1/2	10.630
1-1/4	2-3/4	11.690
1-1/4	3	12.750
1-1/4	3-1/4	13.810
1-1/4	3-1/2	14.880
1-1/4	4	17.000
1-1/4	4-1/2	19.130
1-1/4	5	21.250
1-1/4	5-1/2	23.380
1-1/4	6	25.500
1-1/4	7	29.750
1-1/4	8	34.000
1-3/8	4	17.700
1-1/2	1-3/4	8.930
1-1/2	2	10.200
1-1/2	2-1/4	11.480
1-1/2	2-1/2	12.750
1-1/2	2-3/4	14.030
1-1/2	3	15.300
1-1/2	3-1/2	17.850

Continued on next page →





**ISO 9001 Certified**

**Phone: (651) 451-6666**

**1-800-456-7777**

**Fax: (651) 451-5929**

**Hot Rolled Flats**

**Hot dipped galvanized or pickled & oiled available.**

Stock length: 20 feet


Thickness	Width	Lbs/Ft
1-1/2	4	20.400
1-1/2	4-1/2	22.950
1-1/2	5	25.500
1-1/2	5-1/2	28.050
1-1/2	6	30.600
1-1/2	7	35.700
1-1/2	8	40.800
1-3/4	2	11.900
1-3/4	2-1/2	14.880
1-3/4	3	17.850
1-3/4	3-1/2	20.830
1-3/4	4	23.800
1-3/4	4-1/2	26.780
1-3/4	5	29.750
1-3/4	5-1/2	32.730
1-3/4	6	35.700
2	2-1/4	15.300
2	2-1/2	17.000
2	3	20.400
2	3-1/2	23.800
2	4	27.200
2	4-1/2	30.600
2	5	34.000
2	5-1/2	37.400
2	6	40.800
2	7	47.600
2	8	54.400
2-1/4	2-1/2	19.130
2-1/4	3	22.950
2-1/4	3-1/4	24.860
2-1/4	4	30.600
2-1/2	3	25.550
2-1/2	3-1/2	29.750
2-1/2	4	34.000
2-1/2	4-1/2	38.250
2-1/2	5	42.500
2-1/2	6	51.000
3	4	40.800
3	1-1/2	45.900
3	5	51.000
3	6	61.200



**Need help with that hard to find item?**

**Call us this is our specialty!**

**Hot Rolled Floor Plate**



Thickness in inches	Widths	Lengths	Lbs/Sq Ft
16 GA	36, 48	96, 120, 144	3.000
14 GA	36, 48	96, 120, 144	3.750
12 GA	36, 48, 60	96, 120, 144	5.250
1/8	36, 48, 60, 72	96, 120, 144	6.160
3/16	36, 48, 60, 72, 84	96, 120, 144	8.710
1/4	36, 48, 60, 72, 84, 96	96, 120, 144	11.260
5/16	48, 60, 72	96, 120, 144	13.810
3/8	36, 48, 60, 72, 84, 96	96, 120, 144, 240	16.370
1/2	42, 48, 60, 72, 84, 96	96, 120, 144, 240	21.470
5/8	48, 72	96, 120, 144, 240	26.580



**Same day will call and next day delivery available on any item in stock!**



ISO 9001 Certified

Phone: (651) 451-6666

1-800-456-7777

Fax: (651) 451-5929

**Hot Rolled Grip Step**



**Bare or galvanized available.**

Stock length: 12 feet.

**Pre-galvanized 14 Gauge**

Width In inches	Number of diamonds	Channel height in inches	Lbs/Ft
4-3/4	2	1-1/2	2.300
4-3/4	2	2	2.600
7	3	1-1/2	3.000
7	3	2	3.200
9-1/2	4	1-1/2	3.600
9-1/2	4	2	3.800
11-3/4	5	1-1/2	4.200
11-3/4	5	2	4.400
18-3/4	8	1-1/2	6.100
18-3/4	8	2	6.300
24	10	2	7.400

**Pre-galvanized 12 Gauge**

Width In inches	Number of diamonds	Channel height in inches	Lbs/Ft
4-3/4	2	1-1/2	3.200
4-3/4	2	2	3.600
7	3	1-1/2	4.100
7	3	2	4.500
9-1/2	4	1-1/2	5.000
9-1/2	4	2	5.400
11-3/4	5	1-1/2	5.900
11-3/4	5	2	6.200
18-3/4	8	1-1/2	8.100
18-3/4	8	2	8.900
24	10	2	10.400

**Ladder Rung**

**Hot rolled pickled and oiled or galvanized.**

Type	Width	Height	Stock lengths	Lbs/Ft
2-Hole (13 GA)	1-1/4	1-1/2	48-3/4, 60	1.200
3-Hole (13 GA)	1-5/8	1-1/8	48-3/4, 60	1.300
4-Hole (13 GA)	2-1/4	1-1/2	48-3/4, 60	1.500

**Hot Rolled Pipe**

**Available bare, black or galvanized.**

Black number is wall thickness in inches.

Gray number is weight in pounds per foot.

Pipe size	O.D. in inches	SCH 10	SCH 40	SCH 80
1/8	.405	.049	.068	.095
		.1863	.2447	.3145
1/4	.540	.065	.088	.119
		.2570	.4248	.5351
3/8	.675	.065	.091	.126
		.4235	.5676	.7388
1/2	.840	.083	.109	.147
		.6710	.8510	1.088
3/4	1.050	.083	.113	.154
		.8572	1.131	1.474
1	1.315	.109	.133	.179
		1.404	1.679	2.172
1-1/4	1.660	.109	.140	.191
		1.806	2.273	2.997
1-1/2	1.900	.109	.145	.200
		2.085	2.718	3.631
2	2.375	.109	.154	.218
		2.638	3.653	5.022
2-1/2	2.875	.120	.203	.276
		3.531	5.793	7.661
3	3.500	.120	.216	.300
		4.332	7.576	10.250
3-1/2	4.000	.120	.226	.318
		4.973	9.109	12.510
4	4.500	.120	.237	.337
		5.613	10.790	14.980
5	5.563	.134	.258	.375
		7.770	14.620	20.780
6	6.625	.134	.280	.432
		9.289	18.970	28.570
8	8.625	.148	.322	.500
		13.400	28.550	43.390
10	10.750	.165	.365	.593
		18.700	40.480	64.330
12	12.750	.180	.406	.687
		24.200	53.330	88.510
14	14.000	.250	.437	.750
		36.710	63.370	106.100



ISO 9001 Certified



ISO 9001 Certified

Phone: (651) 451-6666

1-800-456-7777

Fax: (651) 451-5929

**Hot Rolled Plate**

Thickness in inches	Widths	Lengths	Lbs/Sq Ft
3/16	48, 60, 72, 84, 96	96, 120, 144, 240	7.660
1/4	36, 48, 60, 72, 84, 96	96, 120, 144, 240	10.210
5/16	36, 48, 60, 72, 84, 96	96, 120, 144, 240	12.760
3/8	36, 48, 60, 72, 84, 96	96, 120, 144, 240	15.320
1/2	36, 48, 60, 72, 84, 96	96, 120, 144, 240	20.420
5/8	48, 60, 72, 84, 96	96, 120, 144, 240	25.530
3/4	48, 60, 72, 84, 96	96, 120, 144, 240	30.630
7/8	48, 60, 72, 84, 96	96, 120, 144, 240	35.740
1	48, 60, 72, 84, 96	96, 120, 144, 240	40.840
1-1/4	48, 60, 72, 84, 96	96, 120, 144, 240	51.050
1-1/2	48, 60, 72, 84, 96	96, 120, 144, 240	61.260
1-3/4	48, 60, 72, 84, 96	96, 120, 144, 240	71.470
2	48, 60, 72, 84, 96	96, 120, 144, 240	81.680
2-1/4	48, 60, 72, 84, 96	96, 120, 144, 240	91.890
2-1/2	48, 60, 72, 84, 96	96, 120, 144, 240	102.100
2-3/4	84, 96	96, 120, 144, 240	112.310
3	48, 60, 72, 84, 96	96, 120, 144, 240	122.520

**Abrasion Resisting Plate (AR400)**

Thickness in inches	Widths	Lengths	Lbs/Sq Ft
3/16	30, 72, 84, 96	96, 120, 144, 240	7.660
1/4	48, 60, 72, 84, 96	96, 120, 144, 240	10.210
5/16	48, 60, 72, 84, 96	96, 120, 144, 240	12.760
3/8	48, 60, 72, 84, 96	96, 120, 144, 240	15.320
1/2	48, 60, 72, 84, 96	96, 120, 144, 240	20.420
5/8	84, 96	96, 120, 144, 240	25.530
3/4	84, 96	96, 120, 144, 240	30.630

**Rebar**

Bar No.	Diameter in inches	Lbs/Ft
3	.375	.376
4	.500	.668
5	.625	1.043
6	.750	1.502
7	.875	2.044
8	1.000	2.670



ISO 9001 Certified

**Hot Rolled Rounds**

Hot dipped galvanized available.

Stock length: 20 feet.

Diameter in inches	Lbs/Ft
3/16	.094
1/4	.167
5/16	.216
3/8	.376
7/16	.511
1/2	.668
9/16	.845
5/8	1.043
11/16	1.262
3/4	1.502
25/32	1.630
13/16	1.763
7/8	2.045
15/16	2.347
1	2.670
1-1/16	3.015
1-1/8	3.380
1-3/16	3.766
1-1/4	4.172
1-5/16	4.600
1-3/8	5.049
1-7/16	5.518
1-1/2	6.008
1-5/8	7.051
1-11/16	7.604
1-3/4	8.178
1-13/16	8.773
1-7/8	9.388
1-15/16	10.020

Continued on next page →



ISO 9001 Certified

Phone: (651) 451-6666

1-800-456-7777

Fax: (651) 451-5929

**Hot Rolled Rounds**

Hot dipped galvanized available.

Stock length: 20 feet.

Diameter in inches	Lbs/Ft
2	10.680
2-1/8	12.060
2-1/4	13.520
2-3/8	15.060
2-1/2	16.690
2-5/8	18.400
2-3/4	20.190
2-7/8	22.070
2-15/16	23.040
3	24.030
3-1/8	26.080
3-1/4	28.210
3-3/8	30.420
3-1/2	32.710
3-9/16	33.890
3-5/8	35.090
3-3/4	37.550
4	42.730
4-1/16	44.070
4-1/8	45.440
4-1/4	48.230
4-3/8	51.110
4-1/2	54.080
4-5/8	57.120
4-3/4	60.250
5	66.760
5-1/4	73.600
5-1/2	80.780
5-3/4	88.290
6	96.130
6-1/4	104.300
6-1/2	112.800
6-3/4	121.700
7	130.900
7-1/4	140.400
7-1/2	150.200
7-3/4	160.400
8	170.900
8-1/4	181.800
8-1/2	192.900
8-3/4	204.500
9	216.300
9-1/2	241.000
10	267.000
10-1/2	294.400
11	323.100

**Hot Rolled Sheets**

Pickled and oiled sheet also available.

Gauge	Width in inches	Stock lengths	Lbs/Sq Ft
10 GA (.1345")	36	96, 120	5.625
10 GA (.1345")	48	96, 120, 144, 240	5.625
10 GA (.1345")	60	96, 120, 144, 240	5.625
10 GA (.1345")	72	96, 120, 144, 240	5.625
10 GA (.1345")	84	96, 120, 144, 240	5.625
10 GA (.1345")	96	120, 240	5.625
11 GA (.1196")	36	96, 120, 144	5.000
11 GA (.1196")	48	96, 120, 144, 240	5.000
11 GA (.1196")	60	96, 120, 144	5.000
11 GA (.1196")	72	96, 120, 144, 240	5.000
11 GA (.1196")	84	120	5.000
11 GA (.1196")	96	120	5.000
12 GA (.1046")	36	96, 120, 144	4.375
12 GA (.1046")	48	96, 120, 144, 240	4.375
12 GA (.1046")	60	96, 120, 144, 240	4.375
12 GA (.1046")	72	96, 120, 144, 240	4.375
12 GA (.1046")	84	120, 144	4.375
14 GA (.0747")	36	96, 120, 144	3.125
14 GA (.0747")	48	96, 120, 144, 240	3.125
14 GA (.0747")	60	96, 120, 144	3.125
14 GA (.0747")	72	96, 120, 144	3.125
16 GA (.0598")	36	96, 120, 144	2.500
16 GA (.0598")	48	96, 120, 144	2.500
16 GA (.0598")	60	96, 120, 144	2.500



Committed to meeting our customers' requirements when and where they need it.



ISO 9001 Certified

Phone: (651) 451-6666

1-800-456-7777

Fax: (651) 451-5929

**Galvanized Sheets**

Gauge	Width in inches	Stock lengths	Lbs/Sq Ft
10 GA (.1382")	36	120	5.781
10 GA (.1382")	48	96, 120, 144	5.781
10 GA (.1382")	60	120, 144	5.781
11 GA (.1233")	48	96, 120	5.156
12 GA (.1084")	36	96, 120	4.531
12 GA (.1084")	48	96, 120, 144	4.531
12 GA (.1084")	60	96, 120, 144	4.531
14 GA (.0785")	36	96, 120, 144	3.281
14 GA (.0785")	48	96, 120, 144	3.281
14 GA (.0785")	60	120, 144	3.281
14 GA (.0785")	72	120	3.281
16 GA (.0635")	36	96, 120, 144	2.656
16 GA (.0635")	48	96, 120, 144	2.656
16 GA (.0635")	60	96, 120, 144	2.656
16 GA (.0635")	72	120, 144	2.656
18 GA (.0516")	36	96, 120, 144	2.156
18 GA (.0516")	48	96, 120, 144	2.156
18 GA (.0516")	60	120, 144	2.156
20 GA (.0396")	36	96, 120	1.656
20 GA (.0396")	48	96, 120, 144	1.656
20 GA (.0396")	60	96, 120, 144	1.656
22 GA (.0336")	36	96, 120	1.406
22 GA (.0336")	48	96, 120	1.406
22 GA (.0336")	60	120	1.406
24 GA (.0276")	36	96, 120	1.156
24 GA (.0276")	48	96, 120	1.156
24 GA (.0276")	60	120	1.156

Continued →

**Galvanized Sheets**

Gauge	Width in inches	Stock lengths	Lbs/Sq Ft
26 GA (.0217")	36	96, 120	.906
26 GA (.0217")	48	96, 120	.906
26 GA (.0217")	60	120	.906
28 GA (.0187")	36	96, 120	.781



**Galvannealed Sheets**

Gauge	Width in inches	Stock lengths	Lbs/Sq Ft
10 GA (.1382")	36	120	5.781
10 GA (.1382")	48	96, 120, 144	5.781
10 GA (.1382")	60	120, 144	5.781
11 GA (.1233")	48	120	5.156
12 GA (.1084")	36	120	4.531
12 GA (.1084")	48	96, 120	4.531
12 GA (.1084")	60	144	4.531
14 GA (.0785")	36	120	3.281
14 GA (.0785")	48	96, 120, 144	3.281
14 GA (.0785")	60	120	3.281
16 GA (.0635")	36	96, 120	2.656
16 GA (.0635")	48	96, 120, 144	2.656
18 GA (.0516")	36	120	2.156
18 GA (.0516")	48	96, 120	2.156
18 GA (.0516")	60	96, 120	2.156
20 GA (.0396")	36	120	1.656
20 GA (.0396")	48	96, 120, 144	1.656
22 GA (.0336")	48	120	1.406
24 GA (.0276")	36	96, 120	1.156
24 GA (.0276")	48	96, 120	1.156





ISO 9001 Certified

Phone: (651) 451-6666

1-800-456-7777

Fax: (651) 451-5929

**Hot Rolled Squares**

Hot dipped galvanized also available.

Stock length: 20 feet

Size in inches	Lbs/Ft
3/8	.478
7/16	.651
1/2	.851
5/8	1.329
3/4	1.914
7/8	2.605
1	3.402
1-1/8	4.306
1-1/4	5.316
1-3/8	6.432
1-1/2	7.655
1-5/8	8.978
1-3/4	10.413
2	13.600
2-1/4	17.210
2-1/2	21.250
2-3/4	25.710
3	30.600
3-1/2	41.650
4	54.400
5	85.000
6	122.400

**X-Grate**




Style Designation	Width in inches	Length in inches	Lbs/Sq Ft	Approx. size of opening in inches
3.0	48, 60, 72	96, 120, 144	3.000	15/16 x 3-7/16
3.14	48, 72	120	3.140	1-5/8 x 4-7/8
4.0	48, 60, 72	96, 120	4.000	15/16 x 3-7/16
4.27	48, 60, 72	96, 120	4.270	1 x 2-7/8
6.25	48, 60, 72	96, 120	6.250	13/16 x 3-3/8



**Threaded Rods**

Size	Lbs/Ft
10-32	.075
10-24	.070
1/4-20	.120
5/16-18	.200
3/8-16	.290
7/16-14	.400
1/2-13	.540
9/16-12	.680
5/8-11	.830
3/4-10	1.250
7/8-9	1.650
1-8	2.250
1-1/8-7	2.800
1-1/4-7	3.550
1-3/8-6	4.120
1-1/2-6	5.100
1-3/4-5	7.000
2-4-1/2	8.750

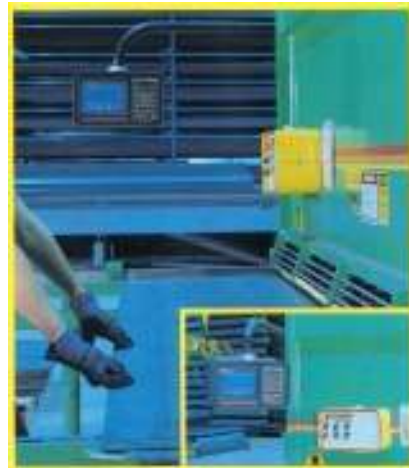

South St. Paul Steel offers a variety of value added processing services.



ISO 9001 Certified